



ESP 5000

Industrial grade electrostatic air cleaner for collection of dry and wet particulates like dust, oil mist, cooking fumes etc. Typical application include Commercial kitchen exhaust, factories, workshops, CNC machine shops etc.

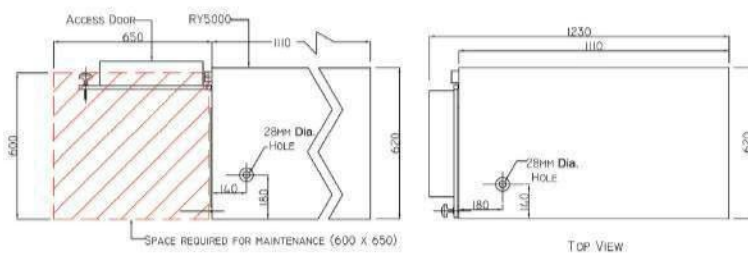

CE
ISO
9001

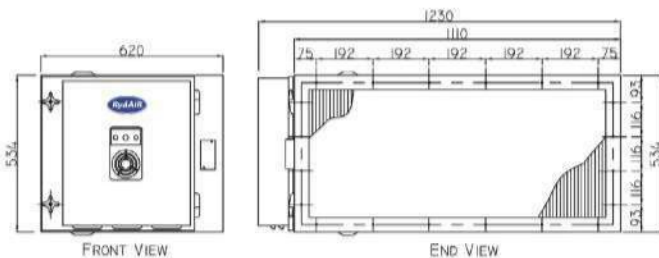

[Spec sheet overleaf >](#)

Tel: 028 9076 7883
 Email: sales@ocireland.com
 Website: www.ocireland.com

ESP 5000

Unit:	H: 534mm / W: 1230mm / L: 620mm
Cabinet	1.2mm Electro Galvanized Steel Powder Coated
Finishing	Dark Blue
Weight	70 Kg
Air Volume	Upto 5000m ³ /hr or 1.38m ³ /s
Air Flow	Left to Right, Right to Left
Static Pressure Req'd	100 Pascal
Operating Voltage	220 Vac+/-10%, 50 Hz (Single phase)
Features	Short circuit, arc protection and auto power restore for Power Pack
Efficiency	Up to 95%, meets NIOSH 5026 Oil Mist Test (National Institute for Occupational Safety and Health)
Particle Size	Collects particles as small as 0.01 microns
Controls	Auto cut-off switch when door is opened. Indicator lights for fault, normal or wash function
Cell	H: 480mm / W: 340mm / L: 550mm / Weight: 15Kg each Ionizing voltage: 12 KVdc Collector voltage: 6 KVdc Uses 2 cells, each cell comprising of 9 ionizing wires & 25 collection plates. Total face Area is 0.528 sqm. Effective collection area is 11.6 sqm
Power consumption	75 Watts (2 cell)
Pre-filter Installation	Aluminum mesh, washable Ceiling suspended, wall or frame mounted
Options	Dry contact for Building Management System (BMS)

Tel: 028 9076 7883
Email: sales@ocireland.com
Website: www.ocireland.com